


Product:

Modular Snap-Fit Multiwall Polycarbonate Panels

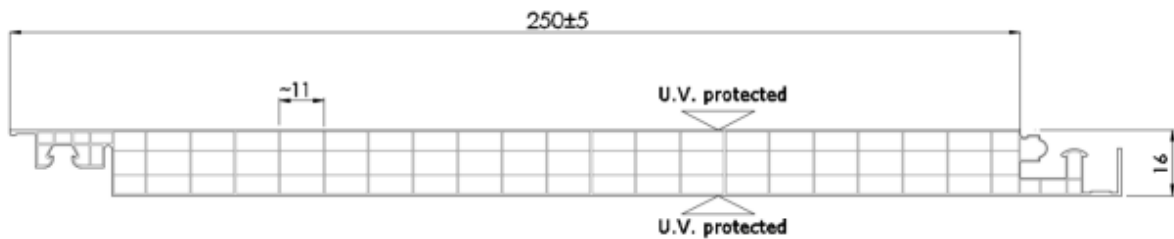

TECHNICAL CHARACTERISTICS:

PARAMETER	VALUE
THICKNESS	16 mm ±5%
STRUCTURE	4-wall straight cell
SHEET WIDTH	250 mm ±5
SHEET LENGTH	Custom (max recommended: 7.00 m)
END CLOSURE	Sealed with alveolar tape
COMPLIANCE	CE EN 16153
COLOR	Satin Neutral – Opaline
UV PROTECTION	UV protected on both sides
FIRE CLASSIFICATION	B s1 d0
OPERATING TEMPERATURE	-40°C to +130°C
LINEAR THERMAL EXPANSION	6.7mm/mm°C × 10 ⁻⁵
THERMAL TRANSMITTANCE (U-VALUE)	2.10 W/m ² K
LIGHT TRANSMISSION – NEUTRAL	80% ±2
LIGHT TRANSMISSION – OPAL	50% ±2
WARRANTY	10 years (contact us for conditions)